


310144

THREE-way ball valve 4 seals with “L” port
Drive: Inox lever
Connection: SMS female/female/female
Flow: full
Material: Aisi 304L - 316L
Measure: from DN 20 to DN 100
Seals: virgin P.T.F.E.
Operating temperature: -20°C +160°C
Outer finish: polished


On request

Antistatic device ATEX (Directive 94/9/EC)
• DIN female connection
• DIN male connection
• Seals made of:
P.T.F.E. with glass
P.T.F.E. with carbographite
High-molecular weight polyethylene

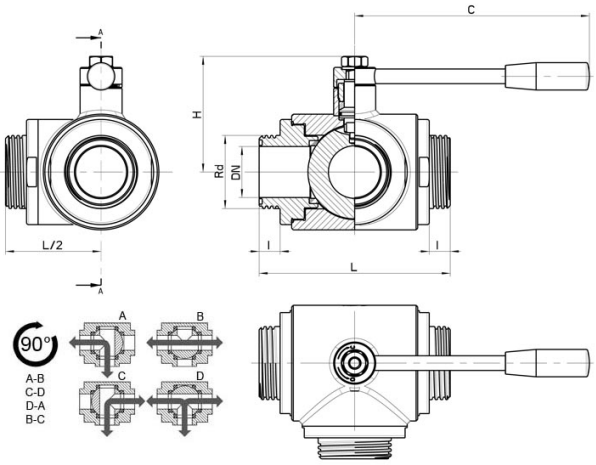

SMS	DN	Rd	L	l	C	H	PN	Kg	CODE AISI 304L	CODE AISI 316L
25	20	40 x 1/6"	130	19	160	70	40	2,27		310144 62010
25	25	40 x 1/6"	140	19	160	80	40	3,10	310144 42610	310144 62610
38	32	60 x 1/6"	156	19	190	95	40	5,07	310144 43010	310144 63010
38	40	60 x 1/6"	172	19	190	110	40	7,42	310144 43410	310144 63410
51	50	70 x 1/6"	182	19	220	120	25	9,01	310144 43810	310144 63810
63 *	65	85 x 1/6"	196	21	285	130	25	10,95	310144 44410	310144 64410
76 *	65	98 x 1/6"	196	21	285	130	25	10,95	310144 44510	310144 64510
76 *	80	98 x 1/6"	256	27	310	145	16	22,40	310144 44810	310144 64810
104 *	100	125 x 1/4"	286	27	310	160	16	35,00	310144 45410	310144 65410
101 *	100	132 x 1/6"	286	27	310	160	16	-	310144 45510	310144 65510

* Four way

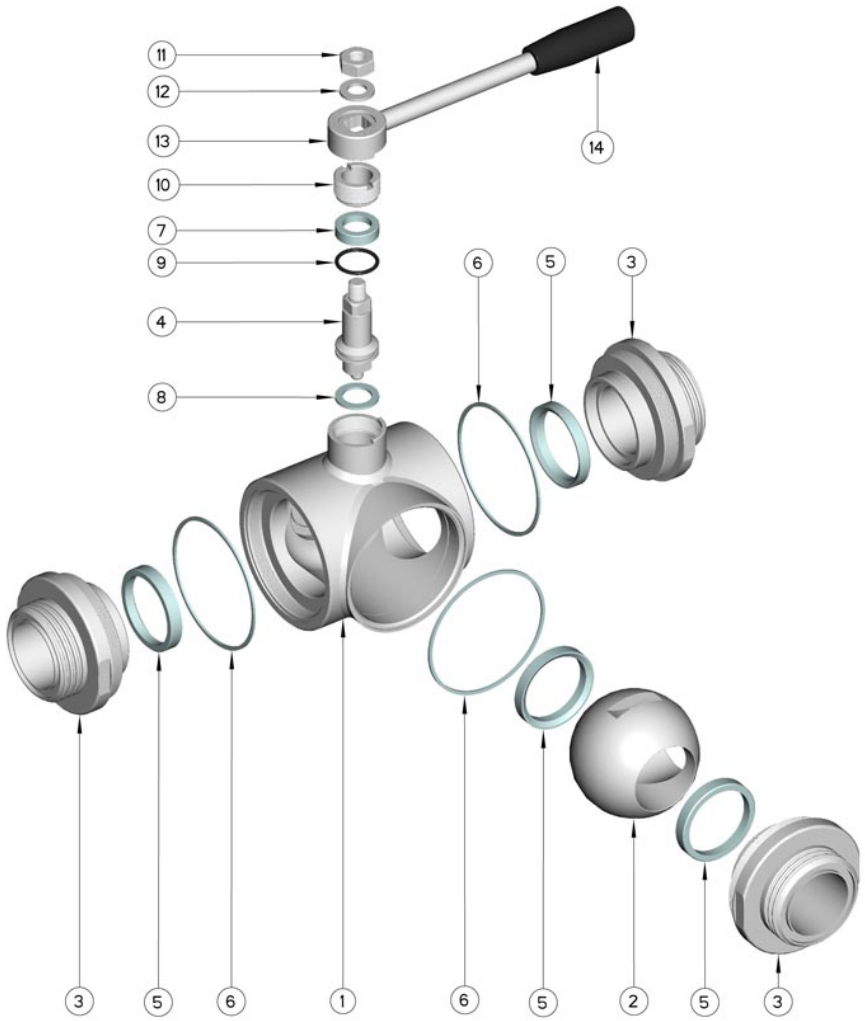

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 304L - 316L
2	Ball	1	AISI 304L - 316L
3	Sleeves	3	AISI 304L - 316L
4	Stem	1	AISI 304L - 316L
5	Ball seals	4	PTFE
6	Sleeve seals	3	PTFE
7	Stem seal	1	PTFE
8	Stem seal	1	PTFE
9	Stem OR-seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Nut	1	AISI 304L
12	Washer	1	AISI 304L
13	Lever	1	AISI 304L
14	Handle	1	Resina

