

Vante® TPE SEALER SYSTEM (Thick Wall)



The TPE Sealer produces consistent, quality seals on most TPE tubing used in biopharmaceutical manufacturing. This sealer is easy to clean, portable and compact. One-button operation makes this sealer easy to use and validate. The unique remote thin wall sealing head clamps and hangs from tubing for convenient use with manifold systems. The Thick Wall Sealing Head seals thick wall (.125) tubing: .375 OD - .750 OD. Operates 100-240V, 50/60 Hz outlet (Compressed air required) CE marked.

TPE Sealer Generator/Controller 3160

This generator/controller can be teamed with one of the two sealing heads and seals tubing up to 0.750 in. (19 mm) O.D. with up to 0.125 in. (3.175 mm) wall thickness.

TPE Sealer Thick Wall Remote Sealing Head 3162


The unique Remote Sealing Hand clamps and hangs from tubing for convenient use with manifold systems.

Features:

- Password Protected Setting
- Remote sealing head
- Built in safety lock

Benefits:

- Compact
- One button operation
- Adjustable sealing temperature and dwell time
- Easy to clean
- Portable, hands free design
- Easy to operate

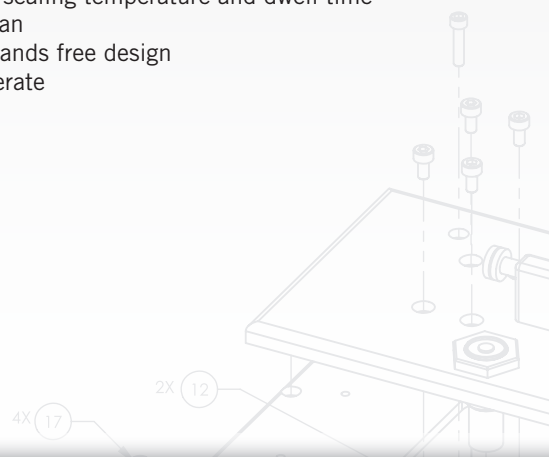

Vante® TPE SEALER SYSTEM

(Thick Wall)

MECHANICAL SPECIFICATIONS

	3160	3162
Dimensions (W x L x H)	7 x 9 x 4 in 18 x 25 x 10 cm	3.2 x 5.9 x 1.8 in 8 x 15 x 4.5 cm
Operating Weight	6 lbs (2.7 kg)	2.3 lbs (1.04 kg)

ELECTRICAL SPECIFICATIONS

Certifications	WEEE, CE, cTUVus	WEEE
Power Input	100-120 VAC, 50/60 Hz, 1.2 amps 230 VAC, 50/60 Hz, 0.4 amps	100-120 VAC, 50/60 Hz 230 VAC, 50/60 Hz
Main Fuses	100-120 VAC: 1.6A-T 250 VAC 230 VAC: 0.8A-T, 250 VAC	—

PERFORMANCE FACTORS

Tubing Size	.125"-.750" OD, .125" TH	0.375"-0.750" OD, 0.125" TH
-------------	--------------------------	-----------------------------

OPERATING CONDITIONS

Temperature	72F +/- 10 (22C +/- 5)	72 F +/- 10 (22 C +/- 5)
Humidity	70% maximum relative humidity	70% maximum relative humidity