



310130

L For DIN Pipe

THREE-way ball valve 4 seals with “L” port
Drive: Inox lever
Connection: **CLAMP normative DIN 32676 TAB.2 REIHE A**
For TUBE according to normative DIN 11850
Flow: Full and reduced
Material: Aisi 316L (1.4404
Measure: from DN10 to DN100
Seals: Modified Virgin P.T.F.E.
Operating temperature: -20°C+170°C
Outer finish: Polished
On request:
Antistatic device ATEX:
II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T135°C Db
M.O.C.A. CE 1935/2004
• Seals made of:
PTFE with glass -20°C+170°C
PTFE with carbographite -20°C+180°C
PTFE with inox -20°C+200°C
UHMW High-molecular weight polyethylene -20°C+80°C


DIMENSIONS AND TECHNICAL DATA

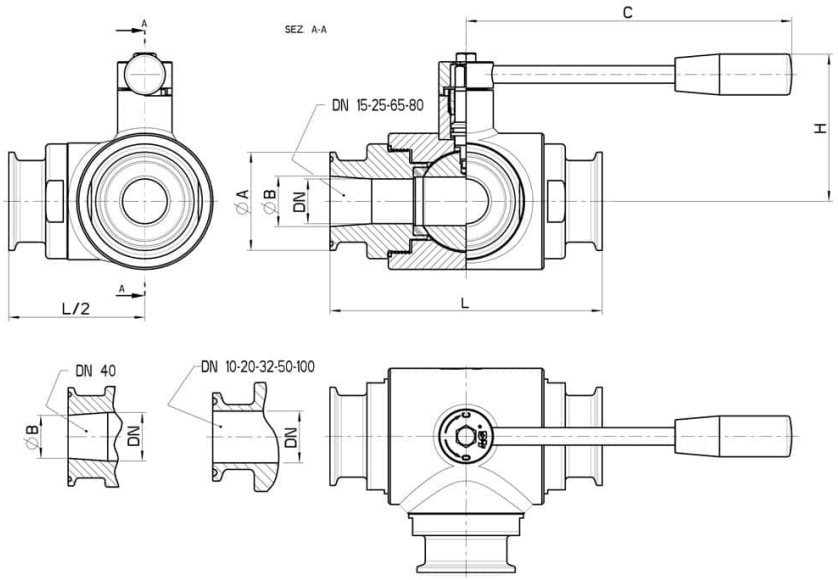

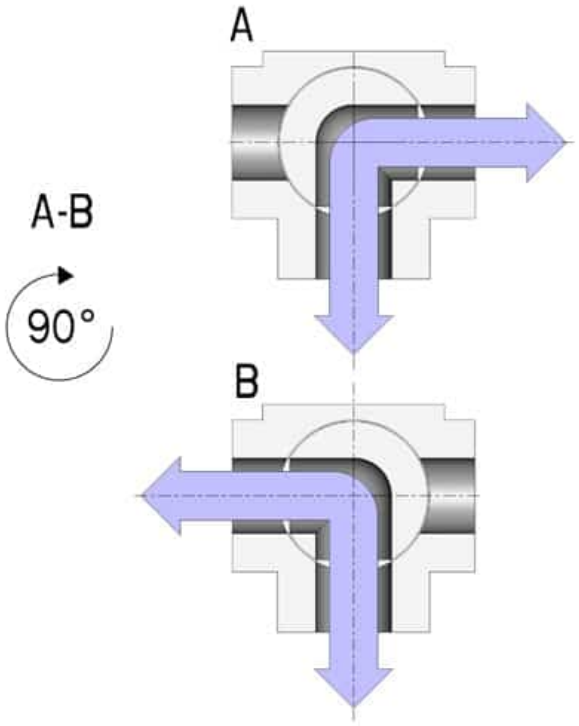


CLAMP REIHE A DN	L	Ø A	Ø B	C	H	PN	Kg	CODE AISI 316L
10	108	34	10	110	60	100	-	310130 61410
15	118	34	16	110	65	100	-	310130 61910
20	130	34	20	160	70	100	-	310130 62010
25	140	50,5	26	160	76	64	3,20	310130 62810
32	156	50,5	32	190	102	64	-	310130 63010
40	172	50,5	38	190	110	64	-	310130 63510
50	182	64	50	220	116	40	-	310130 64010
65	196	91	66	285	125	40	-	310130 64610
80	256	106	81	310	140	40	-	310130 64910
100	286	119	100	310	155	16	-	310130 65610


COMPONENTS AND MATERIALS

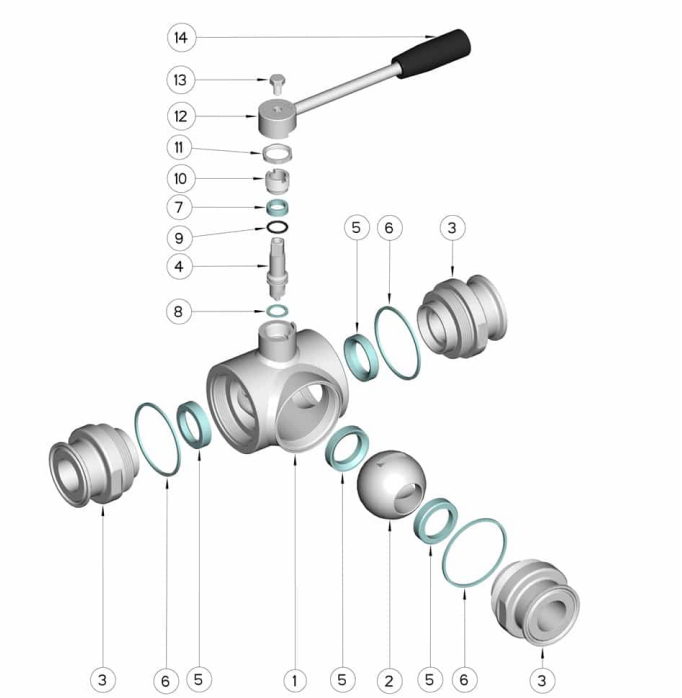

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 304L - 316L
2	Ball	1	AISI 304L - 316L
3	Sleeves	3	AISI 304L - 316L
4	Stem	1	AISI 304L - 316L
5	Ball Seals	4	PTFE Vergine Modificato
6	Sleeve Seals	3	PTFE
7	Stem Seal	1	PTFE
8	Stem Seal	1	PTFE
9	Stem or-Seal	1	FKM
10	Register ring	1	AISI 304L (303)
11	Nut	1	AISI 304L
12	Lever	1	AISI 304L
13	SCREW	1	AISI 304L
14	Handle	1	DUROPLAST (PF)

DIAGRAMS

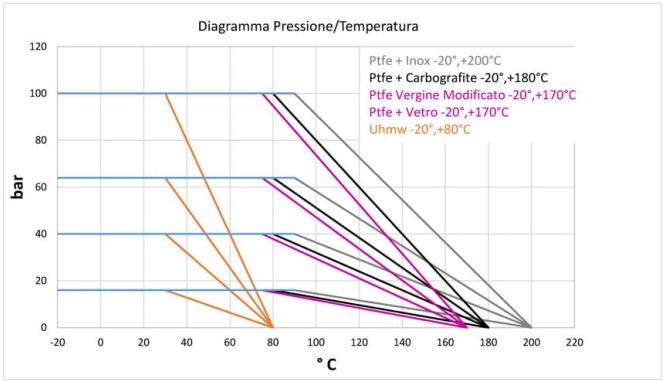
Diagramma Pressione/Temperatura
Ptfe + Inox -20°,+200°C
Ptfe + Carbografite -20°,+180°C
Ptfe Vergine Modificato -20°,+170°C
Ptfe + Vetro -20°,+170°C
Uhmw -20°,+80°C
bar
°C

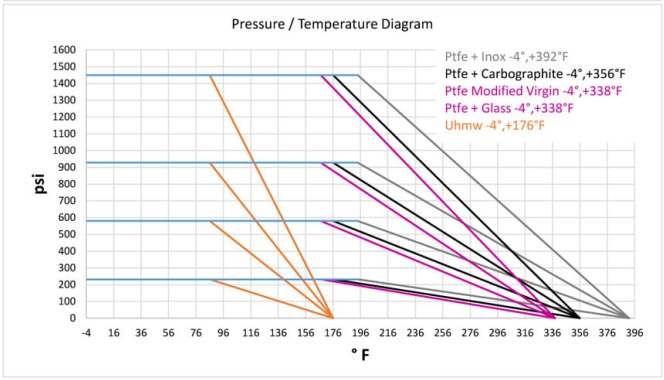
Pressure / Temperature Diagram
Ptfe + Inox -4°,+392°F
Ptfe + Carbographite -4°,+356°F
Ptfe Modified Virgin -4°,+338°F
Ptfe + Glass -4°,+338°F
Uhmw -4°,+176°F
psi
°F